


1/4" BELTING, 2 PLY

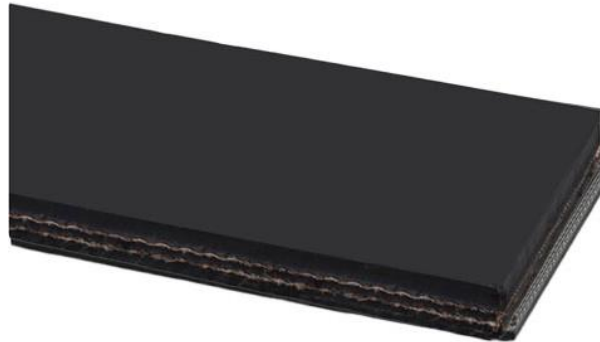

Description:

This belt is designed to provide excellent abrasion resistance and flex life, making it an optimal choice for most conveyor belt applications. Its high-tension synthetic fabrics minimize stretch, offer great fastener-holding ability, and deliver exceptional impact resistance, along with the highest adhesion between plies and cover. Suitable for industries such as agriculture, waste and recycling, aggregate, building materials manufacturing, cellulose, cement, ceramic, construction, foundries, heavy rubber bulk handling, industrial, manufacturing, marble and ceramic, materials handling, metal, mining, municipalities, oil and gas, power generation, quarry, road construction, sand and steel.

Tension Rating:	150 PIW
Number of plies:	2
Overall Thickness:	1/4"
Material:	Black SBR
Temperature Range:	-25 F to 225 F
Sold By:	Square feet