



INTERTAPE POLYMER GROUP® TECHNICAL DATA SHEET

DESCRIPTION

Polyethylene (PE) coated cloth tape with an aggressive pressure sensitive natural rubber adhesive. Designed to answer the need for an economical, approach to applications.


PRODUCT APPLICATION

Packaging, wrapping and sealing, binding and bundling, exterminators, book repair, weather proofing, and general maintenance.

NOMINAL VALUES

The following data are nominal values based on PSTC, ASTM and other standard tests. The data should not be considered as specifications.

Backing	PE Film
Adhesive	Natural Rubber/Resin
Reinforcement	PET Cloth
Adhesion to Steel (oz/in of width) PSTC-101	40 (11 N/25mm)
Quick Stick to Steel (oz/in of width) PSTC-105	18 (4.9 N/25mm)
Tensile Strength (lbs/in of width) PSTC-131	18 (79 N/25mm)
Elongation (% at break)	14
Total Thickness (mils) PSTC-133	9 (0.23mm)
Temperature resistance	+32°F ~ +160°F (+0°C ~ +71°C)
Color	Silver, Black

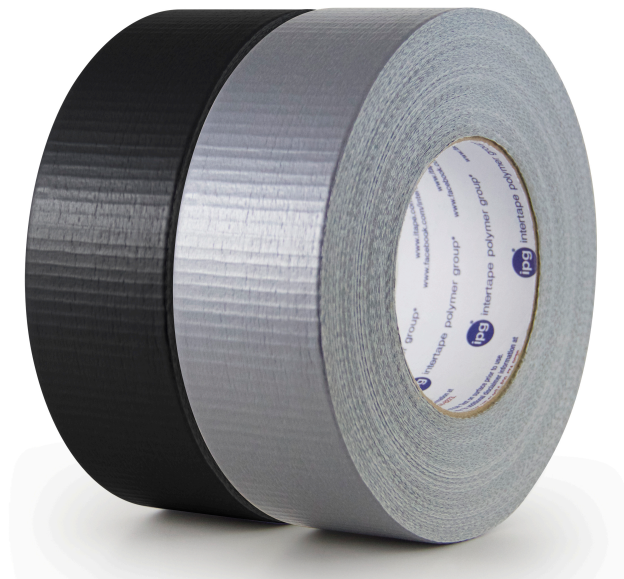

MANSOUR
CHEMICALS & COMMODITIES

Address: 2502 Elm Street | Sudbury, ON | P3E 4R6
Phone: 705-682-3389 | Email: info.mcc@mansourgroup.inc
www.mansourgroup.inc

