


CHALLENGER EPDM HOSE

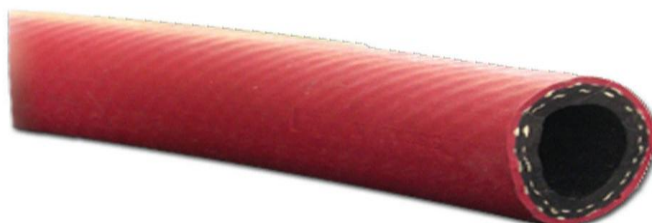

DESCRIPTION:

An economical EPDM multi purpose hose used in a wide range of air, water, and light agricultural chemical applications. Challenger General Service hose is used in construction, marine, agricultural, and industrial applications.

Construction: Tube- Black EPDM blended rubber

Reinforcement: Polyester yarn

Cover: Smooth red abrasion resistant EPDM blend.

Temperature Range: -20°C to +93°C (-4°F to +200°F)

Parts No.	I.D. Inches	O.D. Inches	Max W.P. @ 70°F/20°C	Approx. Wt. Per. Ft. Lbs.	Reel Quantities
CHAL-.25-250	1/4	0.51	250	0.110	600 ft = 300 ft + 300 ft
CHAL-.375-250	3/8	0.67	250	0.160	600 ft = 300 ft + 300 ft
CHAL-.5-250	1/2	0.83	250	0.230	600 ft = 300 ft + 300 ft
CHAL-.625-250	5/8	1.024	250	0.320	600 ft = 300 ft + 300 ft
CHAL-.75-250	3/4	1.14	250	0.400	400 ft = 200 ft + 200 ft
CHAL-1-200	1	1.40	200	0.530	400 ft = 200 ft + 200 ft