

Catalog #	81
Item number:	10434
Description:	2 Ply 220 3/16in x 1/16in Hot Asphalt SOR
International Designation:	N/A

Pulley Diameter, Minimum	
Min. Pulley Dia. - Head @ 80 - 100% Tension	16.00 in
Min. Pulley Dia. - Head @ 60 - 79% Tension	14.00 in
Min. Pulley Dia. - Head @ 59% Tension or Below	10.00 in
Minimum Pulley Diameter- Tail	10.00 in

Construction:	
Compound Top Cover	Black Nitrile
Color	Black
Top Cover Thickness (in)	(4.83 mm) 3/16 in
Top Cover Description	Smooth
Compound Bottom Cover	Black Nitrile
Bottom Cover Thickness (in)	(1.60 mm) 1/16 in
Bottom Cover Description	Smooth
Number of Plies	2
Overall Gauge (in)	(9.65 mm) 3/8 in
Unit Weight- lb/PIW	0.1810 lbs/PIW
Carcass Type	Poly/Nylon
Compound	Black Nitrile
Temperature Range (°F)- High	300 °F
Temperature Range (°F)- Low	-10 °F

Splice Instructions:	
Splice Step Size	8.00 in
Splice Process	Step Hot

Other:	
Static Conducting	No
Cross Rigid	No
High Heat	Yes
Impression Top	No
Oil Resistant	Yes
Fire Resistant	No
FDA Approved	No

Belt Strength:	
Tension Rating (PIW)	220 PIW

Suggested Fasteners:	
Flexco Plate/Rivet	#190/R5
Flexco Hinged	#375 or 550
Alligator Staple	N/A
Clipper Lace	N/A
Alligator Lace	N/A

Special Characteristics:
 When oil and heat are present, this compound offers excellent resistance to swelling and cracking. Do not use for dry heat. Oil must be present.

**** All Values are nominal and subject to change without notice. ****

OIL RESISTANT SOR


2 PLY 220 PIW 3/16 X 1/16 HOT ASPHALT SOR

81


Catalog Number

10434

Part Number

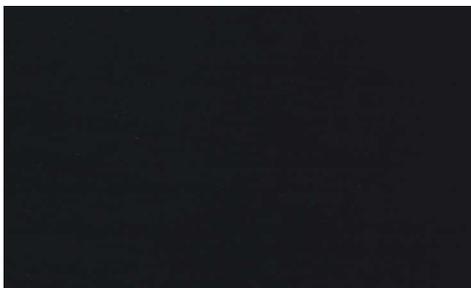

Top Cover View

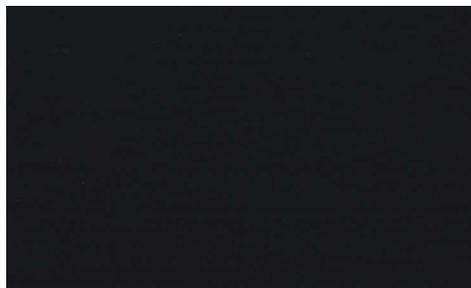

Bottom Cover View



Ply View